



MOKA
Digital Signage





عن Moka

موكا هي شاشات عرض رقمية يتم تصنيعها في ممانع TCL العالمية تتميز بجودة عالية ومميزات احترافية تناسب جميع الاحتياجات

About Moka

MOKA Digital Signage displays that are manufactured in TCL global factories and .are characterized by high quality and professional features that suit all needs

Digital Signage DS60



اطار 9,0mm
Frame 9,0mm

Digital Signage DS60

Narrow Bezel 4 Even Bezel Design

تصميم أربع إطارات بحواف متساوية

Frame thickness 9.0mm بسماكة



depth 39.6mm خلفية الشاشة بعمق

Slim and clean Back Design
تصميم خلفي نحيف وأنيق ويساعد على
سهولة التركيب وترتيب الاسلاك



Digital Signage DS60

Saturated High Color Gamut ,
Clear and Wide Viewing Angle
مجموعة ألوان عالية مشبعة، زاوية
مشاهدة واضحة وواسعة



A non-glossy screen that facilitates
easy viewing and perfect colors.
شاشة غير لامعة تساعد على
المشاهدة بسهولة واللوان مثالية



Landscape and portrait Support



إمكانية استخدام الشاشات بشكل عمودي و أفقي بكل سهولة

Digital Signage DS60


Time Switch Auto Loop play
useing USP All day Preset
Operation Auto play Scheduler
تشغيل الصور في حلقة تبديل تلقائية
حسب الوقت مع إمكانية استخدام
التشغيل التلقائي طوال اليوم



Intelligent Multi-template Split-
View Managment , Support
Your Business Success Daisy -
Chain Template Dinamic Effects
Attractive Visual Effects

إمكانية تقسيم شاشة العرض الى
قوالب متعددة لعرض تأثيرات بصرية
سلسة

Digital Signage DS60

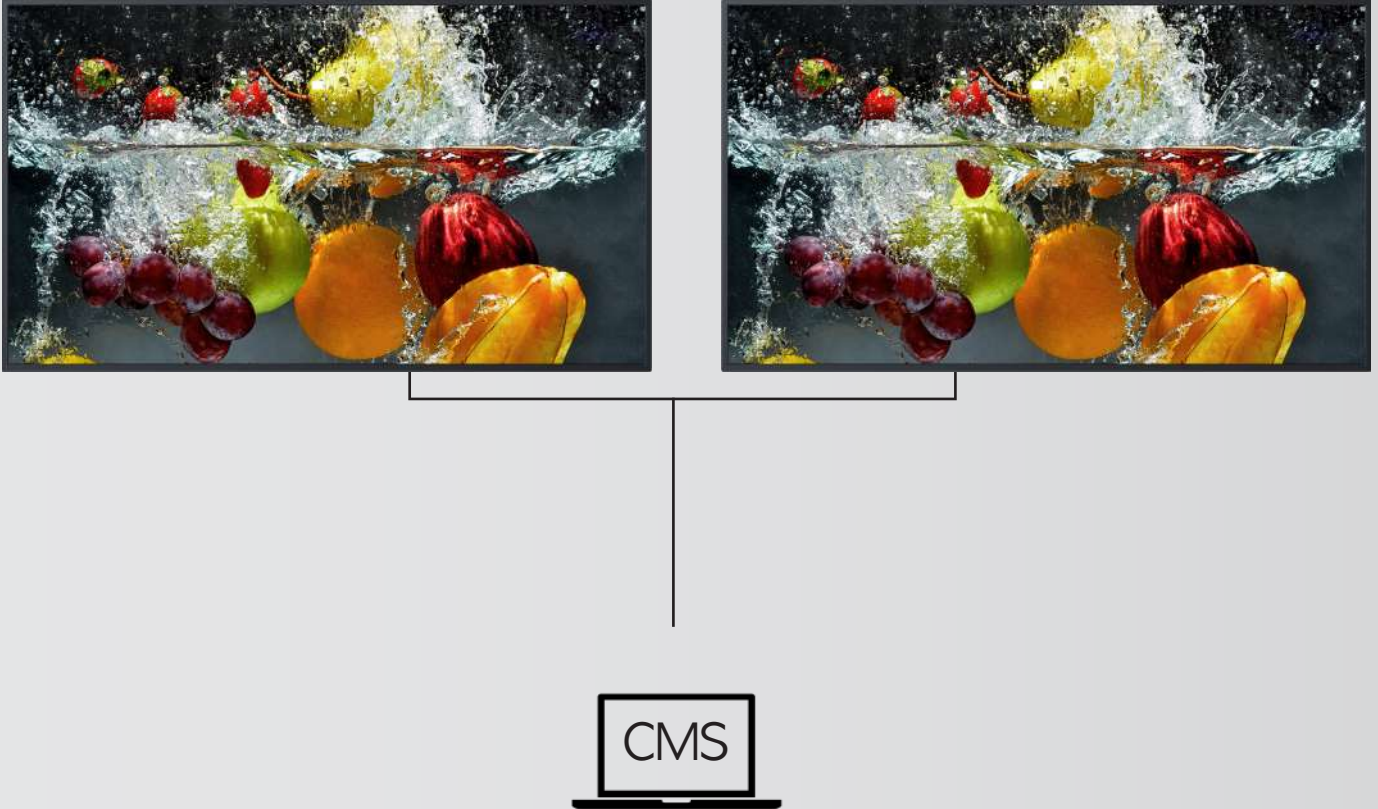

Professional Remote Content Management System Centralized Multi-level Management

نظام احترافي لإدارة المحتوى عن بعد مع إدارة مركزية متعددة مستويات المستخدمين

Digital Signage DS60



Mange your Content via a Computer device or smart devices

إدارة المحتوى الخاص بك من جهاز الكمبيوتر او الاجهزة الذكية

Digital Signage DS60



Managing your content via a flash drive (USB)

إدارة المحتوى الخاص بك عن طريق فلاش ميموري (USB)

Digital Signage DS60



7 /24 Hight Reliable Continuous Play

Efficiency of operation for 50,000 continuous hours without interruption

كفاءة عمل لمدة 50,000 ساعة متواصلة دون انقطاع

استمرارية العرض عالي الجودة على مدار الساعة 24/7

Digital Signage DS60

المواصفات Specifications

Product key points	Item	Definition
Information	Product market name	Digital signage (commercial display)
	Product market model	DS60
	Market	Overseas markets
	Product features	Android intelligent commercial display screen
	Installation mode	Compatible with horizontal and vertical screen installation
	Application Scenario	Advertising in business scenarios / store publicity, etc
ID & MD	ID	Simple style, black matte narrow frame (four equal sides design)
	Texture of material	Support ul94-hb75 fire rating
	MD	Support VESA hanger (horizontal and vertical)
Display	Panel / Inch	32" 43" 50" 55" 65"
	Panel type	Commercial Display Screen
	Panel / Display resolving	2K32" / 4K43" / 4K50" / 4K55" / 4K65"
	Panel / Brightness	500cd/m2
	Panel / Display contrast	4000:1
	Panel / Viewing angle	178°(H)/178°(V)
	Panel / Response time	8ms
	Panel / Display csale	16:9
	Panel / life	≥50000H
	Panel / Surface haze	32Inch: 2k 25% /43Inch: 4K 25% /50Inch 4K 25% /55Inch 4K 25% /65Inch 4K 25%
	Panel / Hard Coating	3H
	Panel / color gamut	≥NTSC 85%
	Resolution	3840 * 2160

Digital Signage DS60

المواصفات Specifications

Display	Backlight / Brighyness	500cd/m2
	Backlight / Backlight	Side entry backlight (ELED)
	Backlight / Requirement	7*24H
Main Board	CPU / CPU	T963 Quad-core ARM Cortex-A35 ARM Mali-G31 MP2
	CPU / GPU	ARM Mali-G31 MP2
	CPU / RAM	2GB
	CPU / ROM	8GB
	CPU / System version	Android 9.0
	WIFI/BT/ WIFI	2.4GHz/5GHz802.11 a/b/g/n/ac
	WIFI/BT/ BT	Bluetooth 5.0 and above, support ble and ibeacon
	WIFI/BT/ Antenna	Built in WiFi / Bluetooth
	RTC	Support continuous power-off clock for no less than 7 days, and the overall working life is no less than 3 years Button battery
Terminal	USB2.0	2
	HDMI2.0	3
	Line OUT	1(3.5mm)
	RJ45	1 100/10Mbps
	RS232	1
	Power interface	1.5m pluggable power cord
Software Speaker	Information release system	Support
	2.0	10W*2 8Ω

Digital Signage DS60

المواصفات Specifications

Working conditions	Input	100~240V@50/60Hz
	Rated power	≤75W
	Standby power	≤0.5W
	Work environment	temperature-10°C~40° Chumidity20%~80% atmos:86KPa~106KPa
	Storage environment	temperature-20°C~55° Chumidity20%~80% atmos:86KPa~106KPa
Standard accessories	Wall hanging rack	One set, VESA standard wall mounted metal hanger (including screw bag), compatible with 32 ~ 65 inch commercial display installation
	Product specification	1
	Remote	1
Authentication	RoHS	
	HDMI	
	CB	
	CE	
	FCC	